



CM-WT30L & CM-WT12L

Photoelectric Type Smoke Detector


ISO9001
Approvals: CE

ĐẦU BÁO KHÓI CHUNG MEI CM-WT12L 12V DC

■ ADVANTAGES

- * With the photoelectric sensing principle, this kind of detector is activated more quickly, accurately and reliably, and there are no false alarm due to chemicals, exhaust gas, wind and exterior light
- * Detector has passed EMC test, which greatly eliminates false alarms caused by interference from nearby sources

■ DIMENSIONS

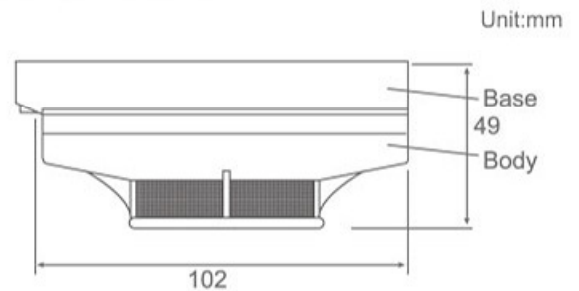

■ SPECIFICATION

MODEL NO.	CM-WT30L		CM-WT12L	SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire	3-wire	4-wire	AMBIENT TEMP.	-10°C ~ +55°C
VOLTAGE RANGE	12V ~ 30V DC		12VDC	AMBIENT HUMIDITY	0 ~ 95%
ALARM CURRENT	24V DC 30mA			MATERIAL	Fire-Proof plastics
CONTACT RATING	N/A		1A @30V DC	DIMENSIONS	102 (Dia.) × 49(H)mm
STANDBY CURRENT	24V DC / 25 μA Below		12VDC 25 μA Below	COLOR	White
POLARIZATION	Non-polarized	Polarized	Non-polarized		
WEIGHT	140g		149g		

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4 M	4M ~ 8M
AREA COVER	150 M ²	75 M ²

■ ORDER INFORMATION

CM-WT30L-31	3-wire with remote indicator output
-------------	-------------------------------------