

LOẠI TRÒN

# CM-FP1

Fire Manual Call Point

ISO9001

Approvals: CE RoHS

# CM-FP116

Fire Manual Call Point

ISO9001

LOẠI VUÔNG - NHẤN BẰ KÍNH



NÚT NHẤN KHẨN CẤP CM-FB116


## ADVANTAGES CM-FP1

- \* Auto-Return by pushing button, no need to disassemble the main body
- \* Response light available to identify the operation completed
- \* Reinforced transparent protective cover is reusable

## ORDER INFORMATION

CM-FP1	Fire Manual Call Point
CM-FP1B	Fire Manual Call Point with base
CM-FP116	Fire Manual Call Point(Glass)

## CM-FP1

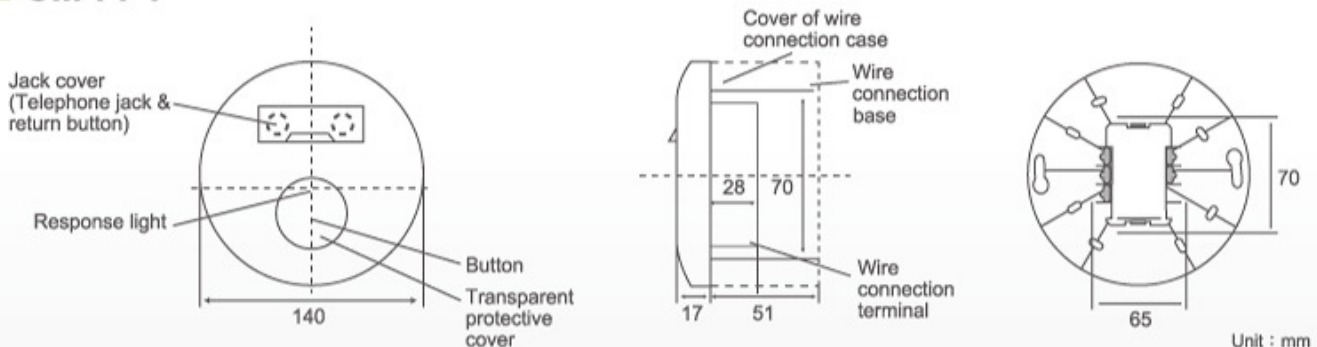

## SPECIFICATION

MODEL NO.	CM-FP1	CM-FP116
VOLTAGE RANGE	24V DC	
ALARM CURRENT	30 mA	-
CONTACT RATING	24V DC 100mA	36V DC 3A
SUB-FUNCTION	Phone jack : Confirmation LED : Reset button	-
OPTION	Base	Glass : Cover
MATERIAL	Fire-Proof plastics	
DIMENSIONS	Φ 140 (mm)	86(L) × 86(W) × 50(H)mm
WEIGHT	150g	200g
COLOR	Red	

## CM-FP116

